


GX SERIES

GXM 2.4 GHz Global Transceiver Module

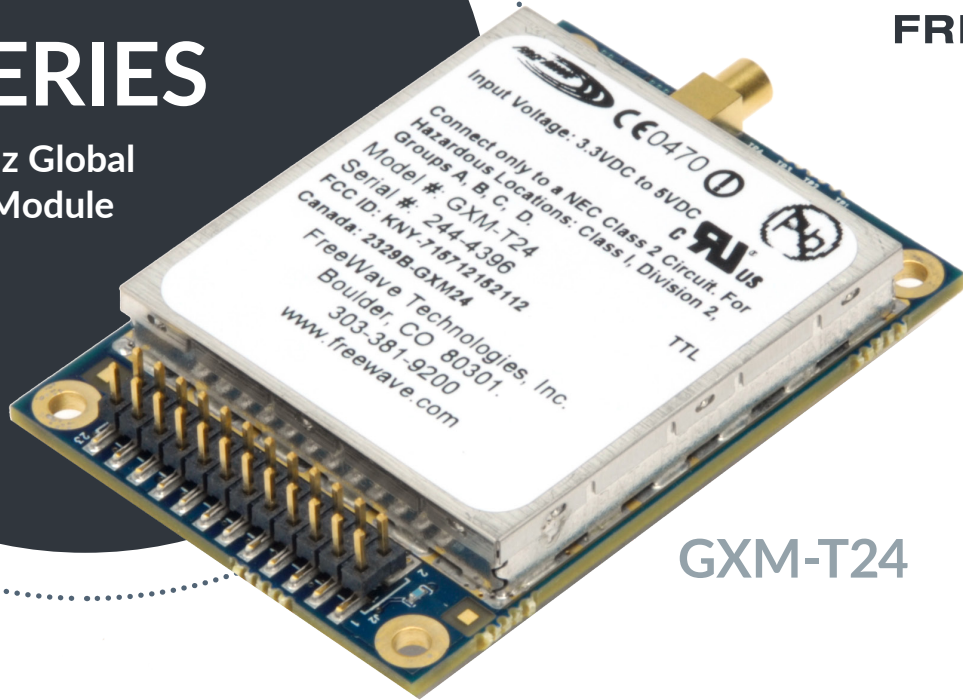

GXM-T24

KEY FEATURES

Improved Low Signal Performance: RISC- based signal demodulation with matched filter

Versatile: single radio can operate simultaneous as a Gateway, Endpoint, Repeater or as an Endpoint/Repeater

High Noise Immunity: Superior performance in noise congested environments

Secure: FHSS technology prevents detection and unauthorized access; 128-bit or 256-bit AES encryption available

Industrial Grade Specifications: 100% tested for RF performance from -40°C to +85°C

Size & Performance: Smallest data radio with the highest performance available

UL Approved: C1D2, ETSI, FCC, IC, & RoHs

Linear power control allows output power to be specified in dBm from +10 to +27 VDC or +10 to +20 VDC if limited to 100 mW
500 mW maximum output power with an optional 100 mW limit to meet compliance requirements

OVERVIEW

Building on the success of our 900 MHz product family, the FreeWave 2.4 GHz GXM radio has been designed to provide OEMs the performance, reliability and quality they have come to know and expect in our products in a globally available spectrum and full ETSI, FCC, IC, RoHS and UL Class 1 Division 2 Certifications.

The 1.4" x 2" form factor of the GXM is a drop-in replacement for the MM2, enabling OEMs to leverage their existing designs for international markets where 900 MHz spectrum is unavailable and is ideally suited for applications where space is a premium. The GXM has all of the functionality of our larger footprint GX family of products and is backward compatible with the I2 Series radio.

All radios are designed, manufactured and tested in Boulder, CO.

SPECIFICATIONS

MODEL	FORM FACTOR	OPTIONS
GXM-T14	50.8 L x 36 W x 9.6 H (mm)	14-pin connector
GXM-T24	50.8 L x 36 W x 9.6 H (mm)	24-pin connector

GXM 2.4 GHz GLOBAL TRANSCIVER MODULE: TECHNICAL SPECIFICATIONS

TRANSMITTER

Frequency Range	2.4 to 2.483 GHz
Output Power	10 mW to 500 mW with options to limit to 100 mW
Data Link Range	20 miles with clear line of sight
Modulation	2 level GFSK
Occupied Bandwidth	230 kHz
Hopping Patterns	15 per band, 105 total, user-selectable
Hopping Channels	3 groups of 80
Hopping Bands	7, user-selectable
Frequency Zones	16 zones
RF Data Rate	Selectable speeds, 115.2 kbps to 153.6 kbps
RF Connector	MMCX

RECEIVER

Sensitivity	-105 dBm @ 115.2 kbps for BER 10 ⁻⁴ -102 dBm @ 153.6 kbps for BER 10 ⁻⁶
IF Selectivity	20 dB at fc +/- 345 kHz
Dynamic Range	+10 dBm 3rd Order Intercept Point at Connector

DATA TRANSMISSION

Error Detection	32 bit CRC, retransmit on error
Data Encryption	AES 128/256 bit encryp on available*, and Proprietary Spread Spectrum Technology
Data Interface	1200 bps to 230.4 kbps

*Contact your Freewave reseller or sales rep for implementation details

INTERFACES

Data Connector	traight 14-pin or 24-pin dual row header 2.0 mm spacing
Dta Throughput	115.2 kbps


POWER REQUIREMENTS

Operating Voltage	+3.3 VDC to +5.0 VDC
+3.3 VDC Typical Current	Transmit: 1200 mA Receive: 165 mA Idle: 35 mA
+5.0 VDC Typical Current	Transmit: 700 mA Receive: 135 mA Idle: 19 mA

GENERAL INFORMATION

Operating Temp	-40°C to +85°C
Humidity	0 to 95%, non-condensing
Dimensions	50.8 L x 36 W x 9.6 H (mm)
Weight	15 g

> GXM 2.4 GHz Global Transceiver Module: Applications

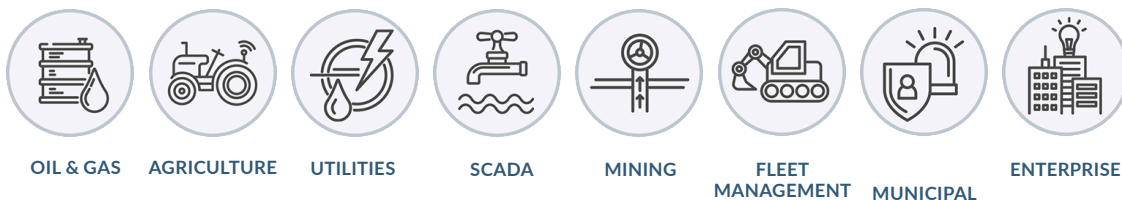

CONTACT US

5395 Pearl Parkway, Boulder, CO 80301
TF 866.923.6168 T 303.381.9200
For more information, visit www.freewave.com